

Switching Control Node

MAINS POWERED



Wiring

Terminate cables into connections as per wiring diagram below.





Fig.1 Switching 230VAC load using normally open (NO) contact (contacts will close during operation)





Fig.2 Switching using volt free contacts using normally open (NO) contact (contacts will close during operation)



WARNING: This device should be installed by a qualified electrician in accordance with the latest edition of the UK Wiring regulations.

This device has been designed to be installed either in a (non-metallic) enclosure, or inside a luminaire.

Dimensions

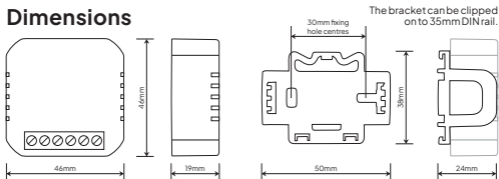

Specifications

Supply Voltage	100VAC to 230VAC	Working Temperature	-10 to +50°C
Supply Frequency	50/60Hz	Unit Weight	0.03kg
Relay Max. Output Current	2 Amps @ 230VAC	Material (Casing)	ABS Dev962 UL 94 VO
Parasitic Power Consumption	550mW	Compliance 2014/35/EU Low Voltage Directive 2014/30/EU Electromagnetic Compatibility Directive 2014/53/EU Radio Equipment Directive 2011/65/EU Restriction of Hazardous Substances (RoHS) Directive	
Max Cabling Length	50m		
Circuit Protection	≤10A MCB Type C		
Terminal Capacity	0.5mm ² to 1.5mm ²		

BLE (Bluetooth) Transceiver

Protocol	Bluetooth	Transmission Power	10 dBm
Operation frequency	2.4 GHz	Control Node to Sensor Range	30m



Scan QR code for full product datasheet



Cucumber
Lighting Controls

Blackhill Dr, Wolverton Mill,
Wolverton, Milton Keynes, MK12 5TS

03330 347799

enquiries@cucumberlc.co.uk

www.cucumberlc.co.uk

