


Dimensions

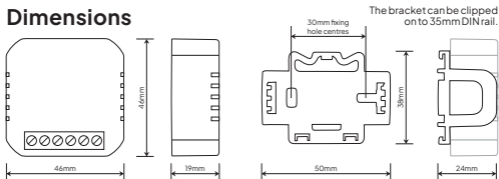

Specifications

Supply Voltage	100VAC to 230VAC	Working Temperature	-10 to +50°C
Supply Frequency	50/60Hz	Unit Weight	0.03kg
No of DALI Drivers	20 max. (using DALI Broadcast only)	Material (Casing)	ABS Dev962 UL 94 VO
Parasitic Power Consumption	110mW	Compliance 2014/35/EU Low Voltage Directive 2014/30/EU Electromagnetic Compatibility Directive 2014/53/EU Radio Equipment Directive 2011/65/EU Restriction of Hazardous Substances (RoHS) Directive	
Max Cabling Length	50m		
Circuit Protection	≤10A MCB Type C		
Terminal Capacity	0.5mm ² to 1.5mm ²		

BLE (Bluetooth) Transceiver

Protocol	Bluetooth	Transmission Power	10 dBm
Operation frequency	2.4 GHz	Control Node to Sensor Range	30m



Scan QR code for full product datasheet



Blackhill Dr, Wolverton Mill,
Wolverton, Milton Keynes, MK12 5TS

03330 347799

enquiries@cucumberlc.co.uk

www.cucumberlc.co.uk

