




## Dimensions

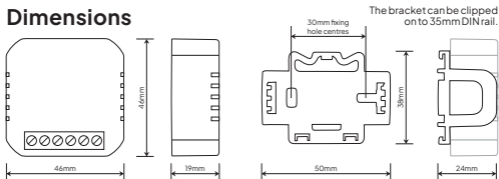

## Specifications

<b>Supply Voltage</b>	100VAC to 230VAC	<b>Working Temperature</b>	-10 to +50°C
<b>Supply Frequency</b>	50/60Hz	<b>Unit Weight</b>	0.03kg
<b>No of DALI Drivers</b>	20 max. (using DALI Broadcast only)	<b>Material (Casing)</b>	ABS Dev962 UL 94 VO
<b>Parasitic Power Consumption</b>	110mW	<b>Compliance</b>	2014/35/EU Low Voltage Directive
<b>Max Cabling Length</b>	50m		2014/30/EU Electromagnetic Compatibility Directive
<b>Circuit Protection</b>	≤10A MCB Type C		2014/53/EU Radio Equipment Directive
<b>Terminal Capacity</b>	0.5mm <sup>2</sup> to 1.5mm <sup>2</sup>		2011/65/EU Restriction of Hazardous Substances (RoHS) Directive

## BLE (Bluetooth) Transceiver

<b>Protocol</b>	Bluetooth	<b>Transmission Power</b>	10 dBm
<b>Operation frequency</b>	2.4 GHz	<b>Control Node to Sensor Range</b>	30m



Scan QR code for full product datasheet



Blackhill Dr, Wolverton Mill,  
Wolverton, Milton Keynes, MK12 5TS

**03330 347799**

**enquiries@cucumberlc.co.uk**

**www.cucumberlc.co.uk**

